

CIRCULAR TEXTURA


DESCRIPTION

SELF-SUPPORTING disposable formwork made up of **high impact polystyrene (HIPS)** and an **external fibreglass reinforcement** to withstand the pressure of the concrete.

USE

- Formwork for reinforced concrete pillars, of circular section, with a textured and visible finish.

RELTEC®

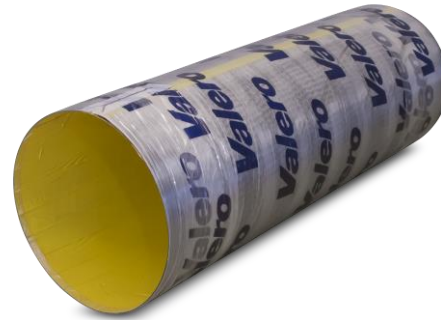

TECHNICAL CHARACTERISTICS

Characteristics	Value
Diameter	From \varnothing 250 to \varnothing 600 mm
Finishing	Textured finish
Stripping	Pull the supplied cable. No stripping substances are required
Standard height	4000 mm
Maximum height of manufacture	4000 mm
Interior waterproofing	Resistant to concrete moisture
Tightness	COMPLETELY TIGHT for smooth and visible finishes

DIAMETER (mm)	WEIGHT (Kg/m)	THICKNESS (mm)
\varnothing 250	0,86	1,30
\varnothing 300	1,25	1,50
\varnothing 350	1,61	1,60
\varnothing 400	2,00	1,70
\varnothing 450	3,37	2,50
\varnothing 500	3,80	2,50
\varnothing 550	4,24	2,50
\varnothing 600	4,67	2,50



TEXTURE

MOD. 004

Wood texture

Important note:

- For protection, covering with plastic is recommended to prevent the formwork being exposed to sun or rain during storage. Similarly, avoid putting weight on the formwork so as not to cause deformities.