


## RELTEC CIRCULAR PS

**RELTEC®**

### DESCRIPTION

**SELF-SUPPORTING** disposable formwork made up of **high impact polystyrene (HIPS)** and an **external fibreglass reinforcement** to withstand the pressure of the concrete.

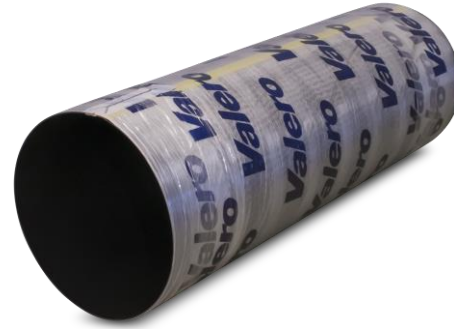

### USE

- Formwork for reinforced concrete pillars, of circular section, with smooth and visible finish.

### TECHNICAL CHARACTERISTICS

Characteristics	Value
Diameter	From 200 to 1200 mm <sup>(1)</sup>
Stripping	Cut at the mark. <b>No stripping substances are required</b>
Standard height	3000 mm
Maximum height of manufacture	12000 mm
Interior waterproofing	Resistant to concrete moisture
Tightness	<b>COMPLETELY TIGHT</b> for smooth and visible finishes

<sup>(1)</sup> Larger diameters available.

DIAMETER (mm)	WEIGHT (Kg/m)	THICKNESS (mm)
Ø 200	0,86	1,30
Ø 250	1,25	1,50
Ø 300	1,61	1,60
Ø 350	2,00	1,70
Ø 400	3,37	2,50
Ø 450	3,80	2,50
Ø 500	4,24	2,50
Ø 550	4,67	2,50
Ø 600	5,20	2,50
Ø 650	5,45	2,50
Ø 700	5,88	2,50
Ø 750	6,31	2,50
Ø 800	6,74	2,50
Ø 850	7,17	2,50
Ø 900	7,60	2,50
Ø 950	8,60	2,50
Ø 1000	8,48	2,50
Ø 1050	8,91	2,50
Ø 1100	9,34	2,50
Ø 1150	9,79	2,50
Ø 1200	10,24	2,50

### Important note:

- For protection, covering with plastic is recommended to prevent the formwork being exposed to sun or rain during storage. Similarly, avoid putting weight on the formwork so as not to cause deformities.