

TUBOTEC®

DESCRIPTION

SELF-SUPPORTING disposable formwork consisting of **cardboard** and **K.A.P. strips** and a **PVC inner sheath** for a smooth finish.

USE

- Formwork for reinforced concrete pillars, of circular section, with smooth and visible finish.


TECHNICAL CHARACTERISTICS

Characteristics	Value
Diameter	From 150 to 600 mm
Stripping	Pull the cable dedicated on the formwork. No stripping substances are required
Standard height	3000 and 4000 mm
Maximum height of manufacture	8000 mm
Interior waterproofing	Resistant to concrete moisture
Tightness	COMPLETELY TIGHT for smooth and visible finishes

DIAMETER (mm)	WEIGHT (kg/m)	THICKNESS (mm)
Ø 150	1,00	1,8 ± 0,5
Ø 200	1,55	1,8 ± 0,5
Ø 250	1,80	2,2 ± 0,5
Ø 300	2,13	2,2 ± 0,5
Ø 350	2,80	2,5 ± 0,5
Ø 400	3,53	2,5 ± 0,5
Ø 450	4,93	3,0 ± 0,5
Ø 500	5,20	3,3 ± 0,5
Ø 550	5,87	3,3 ± 0,5
Ø 600	6,00	3,3 ± 0,5

Important note:

- For protection, covering with plastic is recommended to prevent the formwork being exposed to sun or rain during storage. Similarly, avoid putting weight on the formwork so as not to cause deformities.

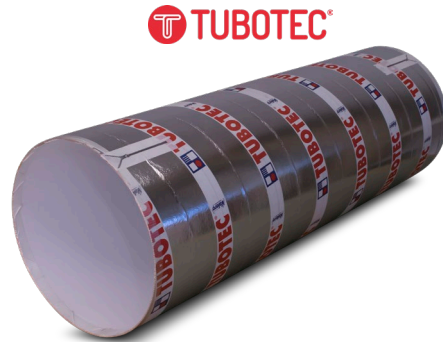

TUBOTEC®